- 5-1/4" HOP Woofer Cone
- Balanced Drive Midrange
- Dome Tweeter
- New Xplōd® design
- 150W max input power (40W RMS)
- Flexible mounting options
- 4Ω Voice Coil

# XS-V1332
# 3-Way Speaker

## Specifications

| | |
|---|---|
| Speaker | Coaxial 3-way:<br>Woofer 12.7 cm (5 1/8 in.) cone type<br>Midrange 3.5 cm (1 7/16 in.) balance dome type<br>Tweeter 1.1 cm (7/16 in.) dome type |
| Maximum input power | 150 watts |
| Rated input power | 40 watts |
| Impedance | 4 ohms |
| Sensitivity | 89 dB/W/m |
| Frequency response | 45-25,000 Hz |
| Mass | Approx. 690g (1 lb. 8 oz.) per speaker |

## Parts

| Part No. | Description |
|---|---|
| 1-825-064-11 | SPEAKER (13cm) (L) |
| 1-825-064-21 | SPEAKER (13cm) (R) |
| 3-240-115-11 | MANUAL, INSTRUCTION (ENGLISH, FRENCH, SPANISH, TRADITIONAL CHINESE) |
| 3-240-667-01 | PLATE, TOP |
| X-3381-856-1 | NET ASSY, GRILLE (x2) |
| 1-574-318-71 | CORD (WITH TERMINAL) (L) (WHITE) |
| 1-574-318-81 | CORD (WITH TERMINAL) (R) (GRAY) |
| A-3315-083-A | SCREW ASSY (x8) |

Design and Specifications subject to change without notice.

SONY

# XS-V1332
## 3-Way Speaker

## Dimensions

**Unit: mm (in.)**

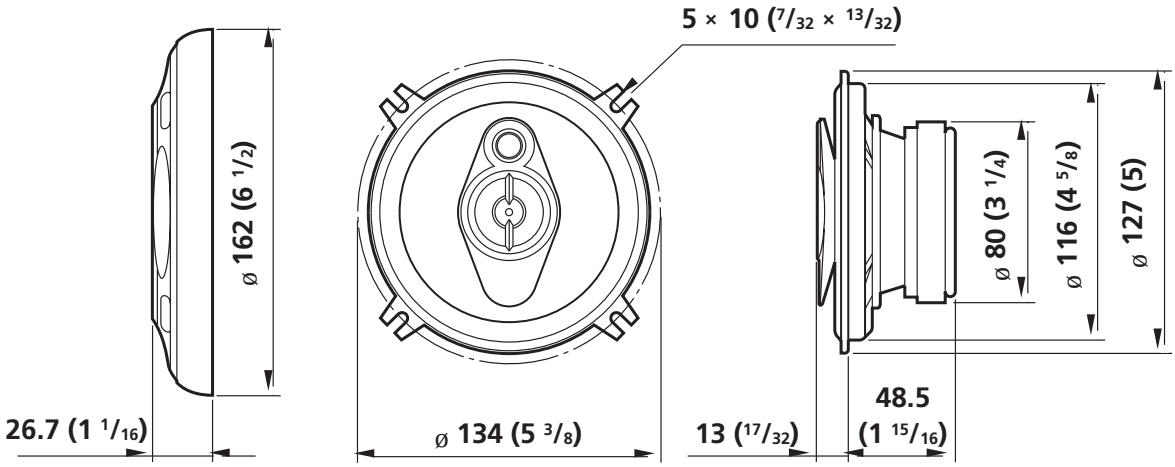


Design and Specifications subject to change without notice.

SONY